

# Pipeline Damage

## Introduction

In this demonstration, Ergo will be used to perform a damage analysis on some buried pipelines in Shelby County Tennessee. It is assumed that the user has already worked through the Ergo Introduction and Tutorial and is familiar with the basic functions of Ergo that can be found in the Building and Bridge Damage Tutorials. If not, then it is suggested that the user do this first before continuing with this tutorial. The sections that follow will take the user through the ingestion process (to get some pipeline data into Ergo) and then run a sample analysis using the Buried Pipeline Sample Inventory for Shelby County Tennessee that can be found in the *Ergo Public Repository*.

## Tutorial Example

### Data


Pipeline data can come in many formats; however, for use in Ergo, the data must be in shapefile format and contain at a minimum, the pipe material type (e.g. cast-iron, pvc) and the diameter. Additional attributes such as joint type and soil type may be required, depending on which fragilities the user wants to assign to the pipeline data. A column for joint type and soil data are required to exist (even if they contain no information) because the schema for this type requires those columns to be present. If your dataset does not contain them, then they will need to be added before ingesting the pipeline dataset into Ergo. Another useful field is the *length* field since this can be used to determine the number of repairs based on the repair rate. Below is a list of the fields required to be present in the dataset:

Field Name	Field Description	Field Type
pipetype	the pipe material	string
jointtype	the type of joint	string
diameter	the diameter of the pipe	double
length	the length of the pipe section	double
soiltype	the type of soil that the pipe is in	string


### Import

Now that we have a better understanding of the data format, we will go through the process of importing a buried pipeline into Ergo. These steps will be just the generic steps since the file in the screenshots is only available in the Turkish version of Ergo, but it will illustrate the process. If you are just going to use the Ergo sample data, you can skip to the next section, *View Pipeline Data*.


- To import a pipeline dataset, launch Ergo if you haven't already done so and go to File-> Import found in the top level menu. You should see a screen similar to the figure below.

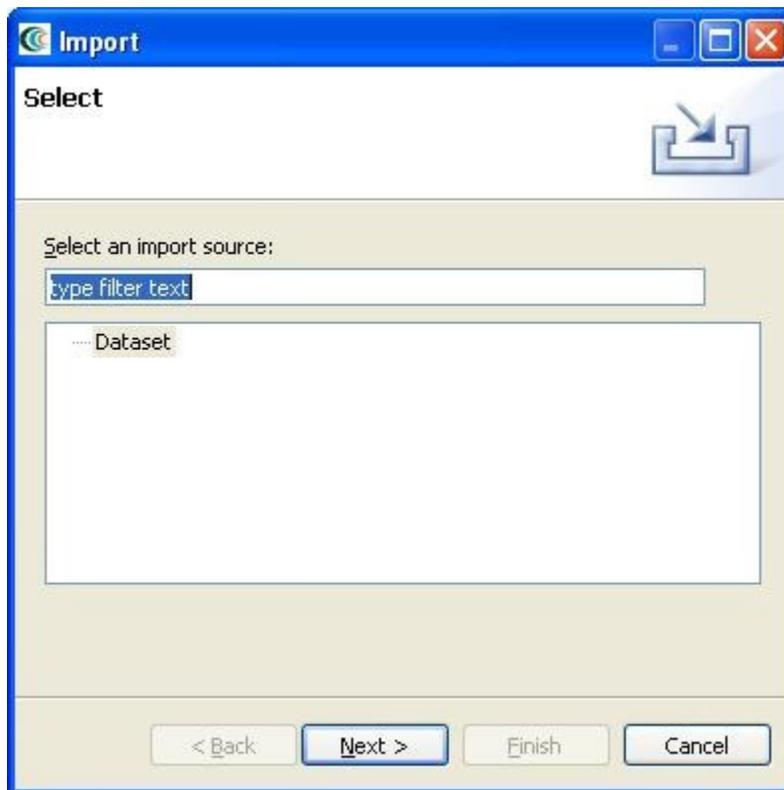


- Click the *Next* button and select *shapefile* from the dropdown menu. You should now see a screen similar to the figure below.

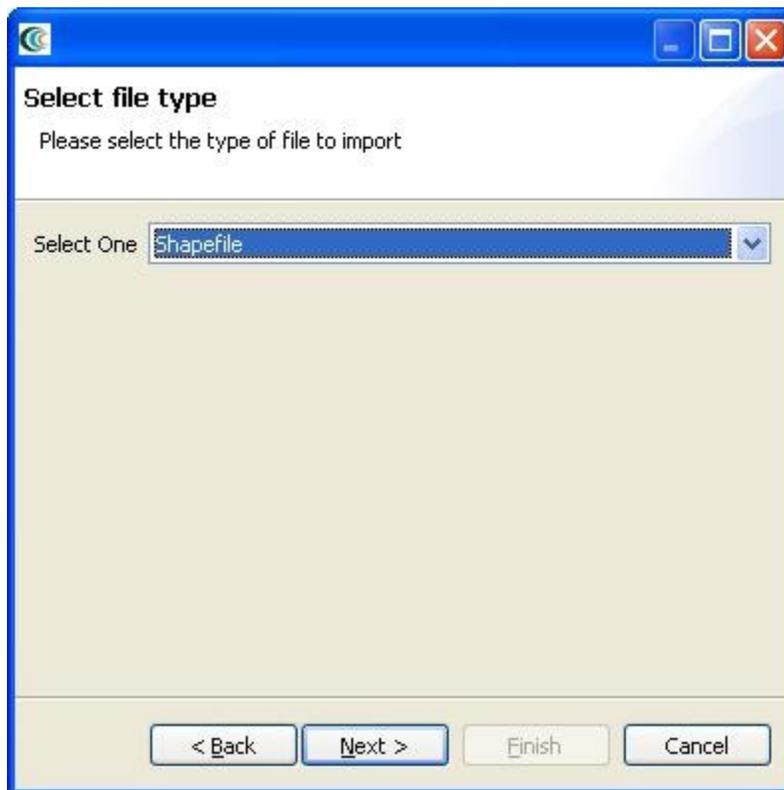


- Click the *Next* button and then browse for the *shapefile* to ingest. Once a file is selected, the user can optionally add location tags to the dataset as metadata. In the future, Ergo will use this information to determine which datasets are near or inside a region of interest. The screen should look similar to the figure below except that the file you chose will be in the text field.

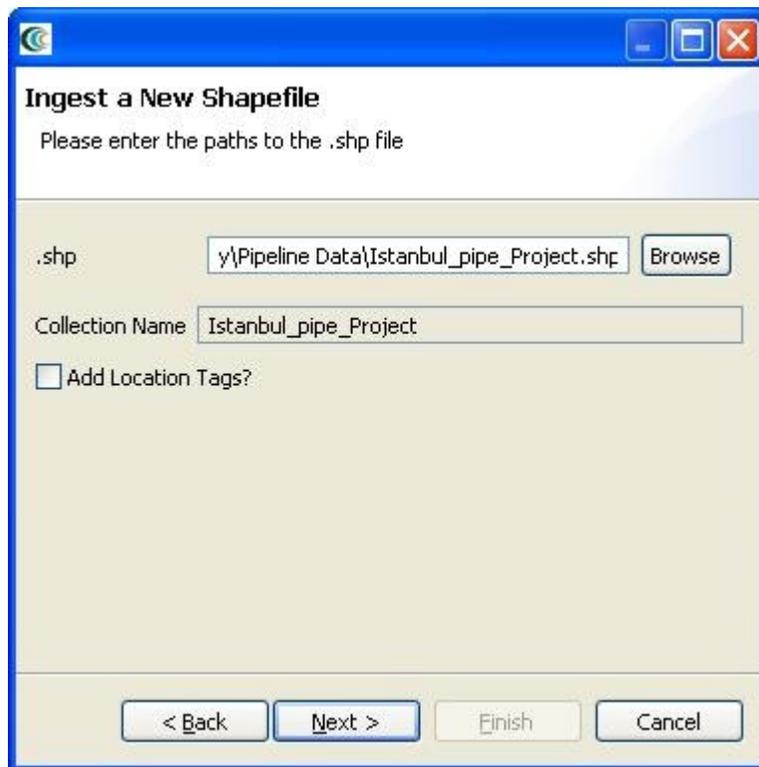


- Click the *Next* button and then select *Buried Pipeline Inventory* from the drop down menu for data type. This tells Ergo what type of data is being ingested so that the appropriate analyses are run on the data and where possible, UI fields can be auto-populated. The screen should look similar to the figure below.

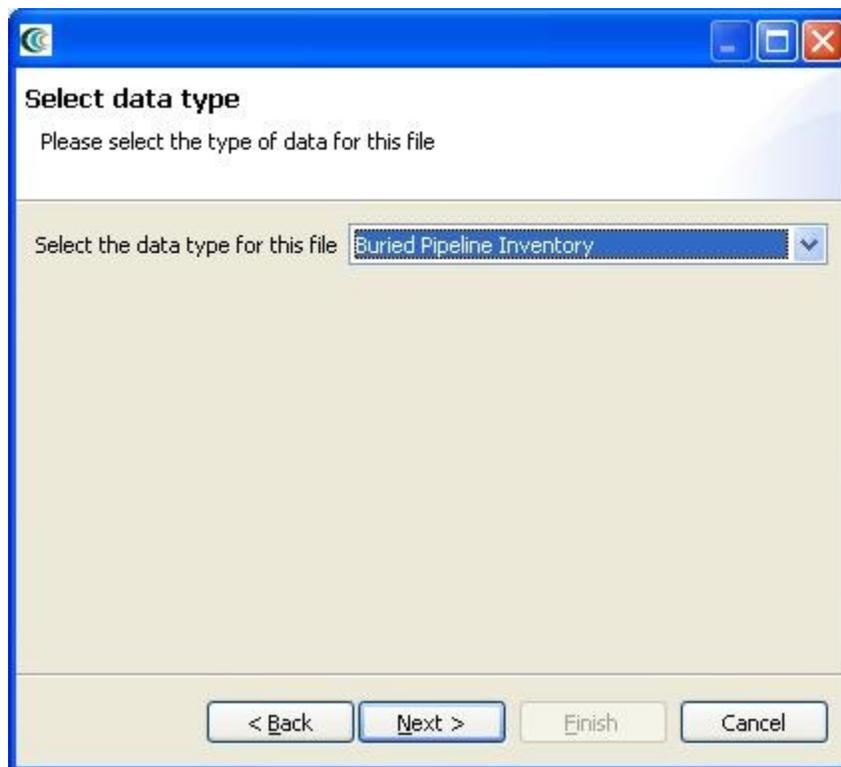

- Click the *Next* button. You should now see a dialog that allows you to map your datasets attributes to the expected attributes. For example, whichever column contains the pipe material type should be mapped to the *pipetype* attribute. For the diameter attribute, select the column that contains the diameter information. The unit type of the diameter will also need to be selected from the Unit drop down menu (e.g. centimeters). Ergo needs this information for any conversions that need to occur. See the figure below for an example mapping. Fields are case sensitive so JointType is different from jointtype.

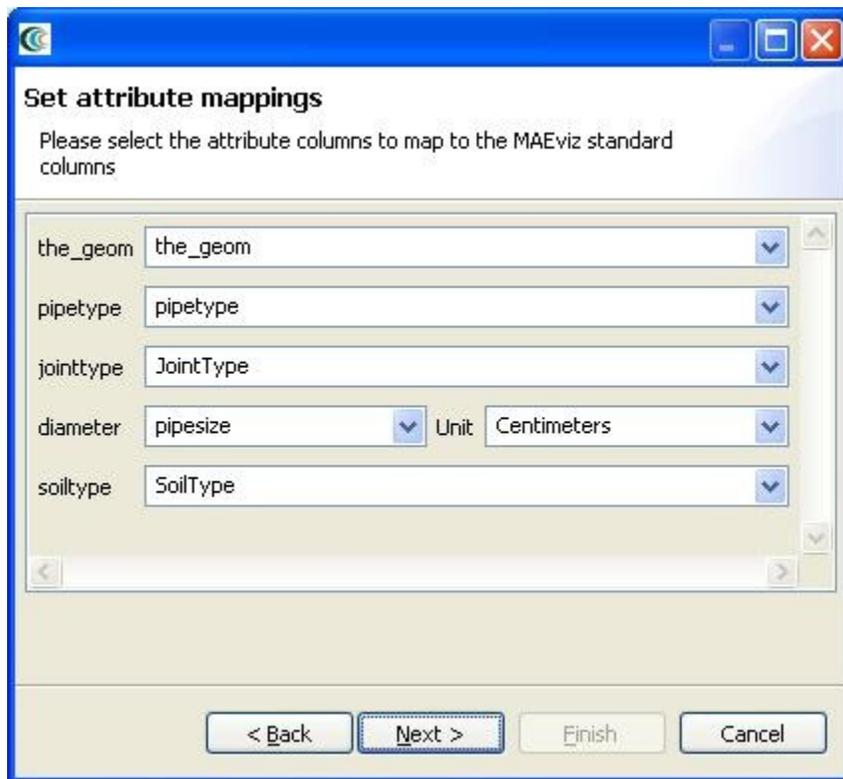

- Click the *Next* button and you might see a dialog similar to the one below. If there are no extra fields in your dataset, then the dialog will be blank; however, if there are additional fields in your dataset you will be given an opportunity to assign them a more friendly-name (e.g. instead of bldgval you could give it Building Value as the friendly-name). The friendly-names will be stored as metadata with no alterations to the underlying dataset.

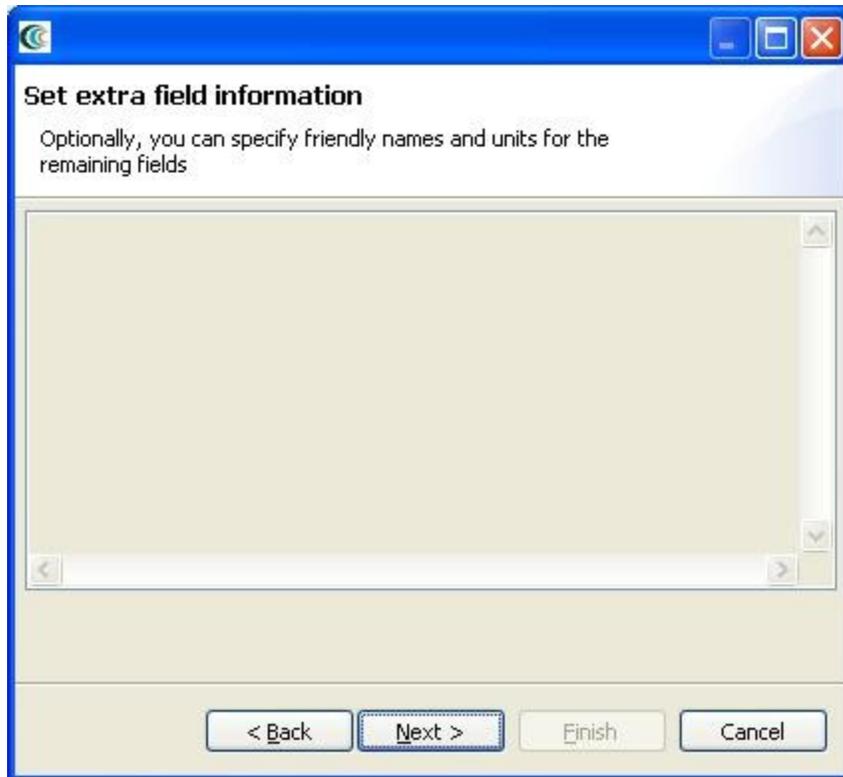

- In our case, there are no additional fields to set information for so click the *Next* button again if you also have a blank dialog. Ergo will now prompt for a repository to put the dataset in, a descriptive name and a version number. See the figure below for an example.

**Descriptive Data**

Please enter the following descriptive information

Repository to ingest to: MAEviz Demo Data (local)

Descriptive name for this dataset: Istanbul Buried Pipeline

Version number of data: 1.0

< Back   Next >   Finish   Cancel


- When Ergo was initially installed, it created a repository called *Ergo Demo Data*, which can be used to ingest the pipeline data into. Otherwise, choose a different repository or set one up through the Ergo catalog view before ingesting the pipeline data. Click the *Finish* button when all fields have been entered.

## Example Scenario


From this point forward we will assume that you are using the sample dataset and will give instructions related to that scenario. In this example scenario, we are going to generate a fictitious earthquake in Shelby County, Tennessee and determine the pipeline damage for the region. If you have not already done so, then you will first need to launch *Ergo*.

## View Pipeline Data

- Next, create a scenario with Shelby County, Tennessee as your region of interest and choose the Ergo 3.1.1 Analysis Defaults as your default set.
- Find the *Ergo Demo Data* repository in the *Data Catalog* view and expand *Lifeline* -> *Buried Pipeline Inventory* -> *Buried Pipeline Sample Inventory*. You should see something similar to the figure below.

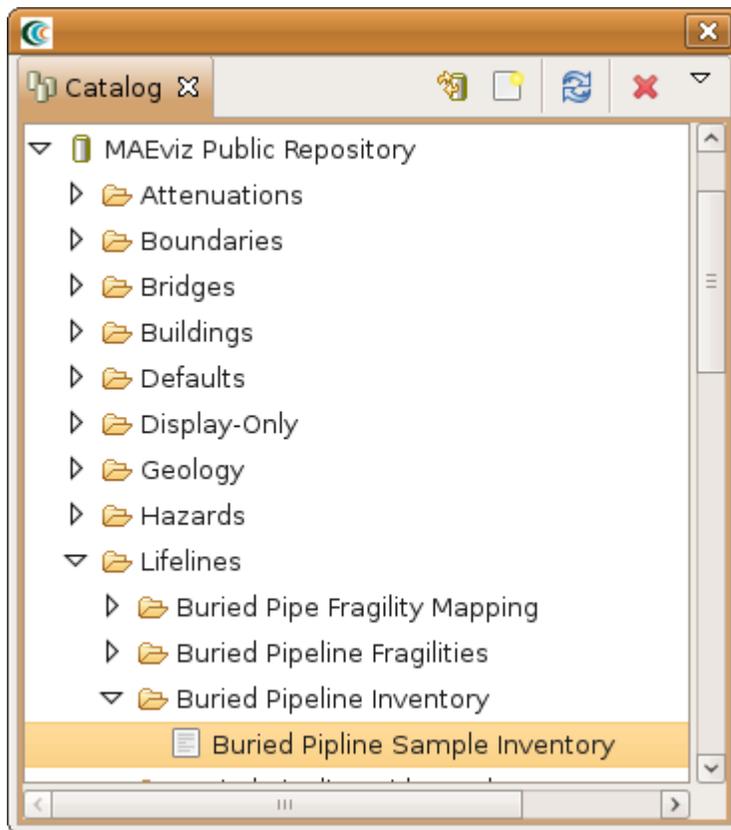

- Add the *Buried Pipeline Sample Inventory* to your scenario and you should see something similar to the figure below.

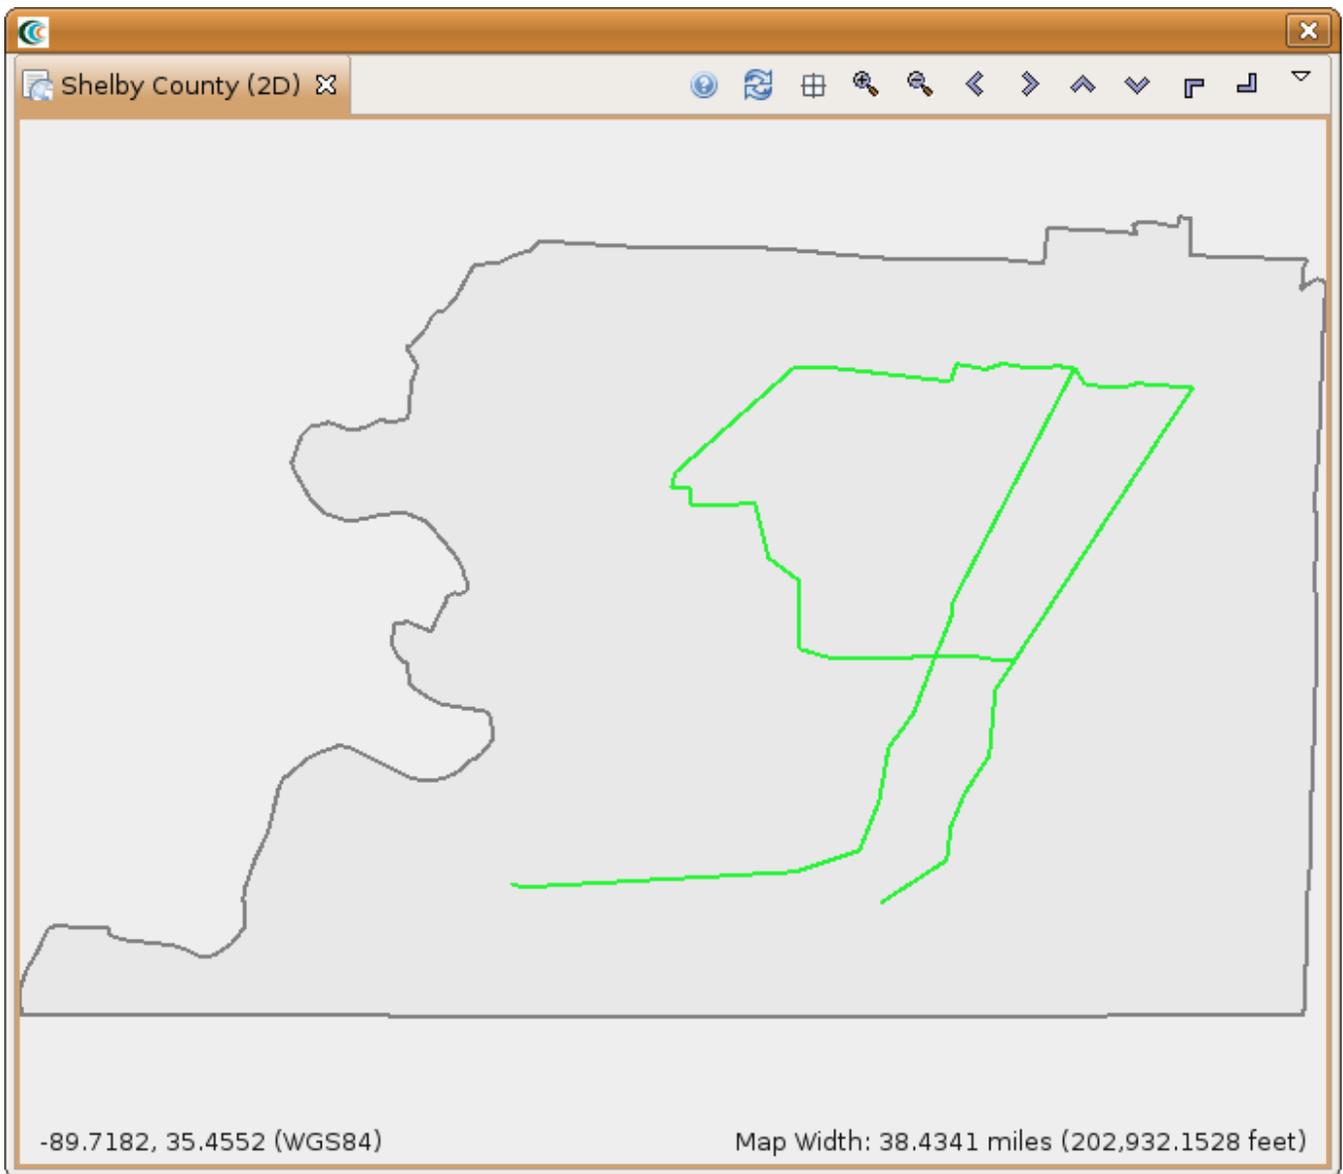

## Analysis

Next, let's look at running the *Buried Pipeline Damage* analysis. This analysis will compute the repair rate for each section of pipe based on the parameters set. To start, bring up the execute analysis window and select *Lifeline* -> *Buried Pipeline Damage*. You should see something similar to the figure below.

The screenshot shows a software window titled "Buried Pipeline Damage (Shelby County)". At the top, a workflow diagram shows "Pipeline inventory" and "Hazard" as inputs to "Buried Pipeline Damage". Below the diagram are "Execute" and "Cancel" buttons. The "Required" section is expanded to show "Basic Information" and "Advanced Parameters".

**Basic Information**

Result Name: Shelby County Buried Pipeline Damage

Pipeline inventory: Buried Pipeline Sample Inventory [Search]

Hazard: [Search] [Create] [Remove]

**Advanced Parameters**

Fragility: Hazus Buried Pipeline Fragilities [Search]

Fragility Mapping: Hazus Buried Pipeline Fragility Mapping [Search]

Use Hazard Uncertainty?:

Include Liquefaction?:

Most of the fields should be filled in by the default set. In our case we need to provide a *Result Name*, a *Hazard*, *Fragilities* and *Fragility Mapping*. For the *Result Name* we will use *Shelby County Buried Pipeline Damage*.

- For the *Fragility* field, search for and find the dataset *Sample Buried Pipeline Fragility Set with Liquefaction*.
- For the *Fragility Mapping* field, search for and find the dataset *Sample Buried Pipe Fragility Mapping with Liquefaction*.
- For the hazard, click the *Create* (gear icon) button next to the *Hazard* field. This should add the *Create Scenario Earthquake* analysis to the graph. Click on *Create Scenario Earthquake* to bring up the form page.
- Provide a *Result Name*, such as *Memphis 7.0 Scenario EQ* and set the magnitude to 7.0. For the *Attenuation* field, select *CEUS Characteristic Event*. You should have a form page similar to the one below.

Buried Pipeline Damage (Shelby County)

Site Class Map  
Fa Site Factors  
Fv Site Factors  
Create Scenario Earthquake  
Hazard  
Pipeline inventory  
Buried Pipeline Damage

Execute Cancel

### Create Scenario Earthquake

[Cancel Analysis](#)

Required Optional

**Basic Information**

Result Name: Memphis 7.0 Scenario EQ

Period Spectrum Method: Best Match

Attenuation: CEUS Characteristic Event

**Earthquake Location**

[Select from Source Event](#)

[Select from USGS Latest Earthquakes](#)

[Select by clicking on the map](#)

Latitude (deg): 35.927

Longitude (deg): -89.919

Magnitude: 7.0

- After all of the required fields are filled in, click the *Execute* button. You should see a damage visualization similar to the one below.

